



AMG PMP Pediatric Oxygenator

PRODUCT HIGHLIGHTS

Hollow-fiber oxygenator with integrated heat exchanger able to oxygenate the blood, remove carbon dioxide from the blood and regulate blood temperature in pediatric patients. It is designed for hemocompatibility for use in extracorporeal circuits.

Key Features

- Polymethylpentene (PMP) fibers
- Phosphorylcholine (PC) coating
- Integrated arterial and venous luer ports
- Compatible with any circuit with 3/8" tubing
- Holder connects to the CentriMag™ System Cart or IV pole



AMG PMP
Pediatric Oxygenator

PRODUCT SPECIFICATIONS

PART NUMBER	DESCRIPTION
US5087	AMG PMP Pediatric Oxygenator Box of 4
US2257	Oxygenator Holder Articulating arm and holder for AMG PMP Oxygenators. Clamps onto vertical posts such as IV poles
210-50142	CentriMag™ System Transporter Oxygenator Bracket, Medium Fixes AMG PMP Pediatric Oxygenator to CentriMag™ System Transporter


TECHNICAL SPECIFICATIONS

OXYGENATOR SPECIFICATIONS	
Membrane Material	Polymethylpentene (PMP) with phosphorylcholine (PC) coating
Blood Flow Rate	0.5 - 4 L/min
Priming Volume	190 mL
Residual Blood Volume	100 mL
Membrane Surface Area	1.35 m ²
Heat Exchanger Type	Stainless steel
Heat Exchanger Surface Area	0.08 m ²
Heat Exchanger Performance Factor	0.64 at 4 L/min
Max Water Pathway Pressure	29 PSI (1,500 mmHg)
Max Gas Pathway Pressure	0.14 PSI (7 mmHg)
Max Blood Pathway Pressure	14.5 PSI (750 mmHg)
Venous Inlet and Arterial Outlet	3/8" barbed connectors
Water Inlet and Outlet	1/2" Hansen ⁺ quick couplings
Gas Inlet	1/4"

PRESSURE, HEAT EXCHANGE AND GAS EXCHANGE CURVES*


O₂ TRANSFER

Efficiency of blood oxygenation

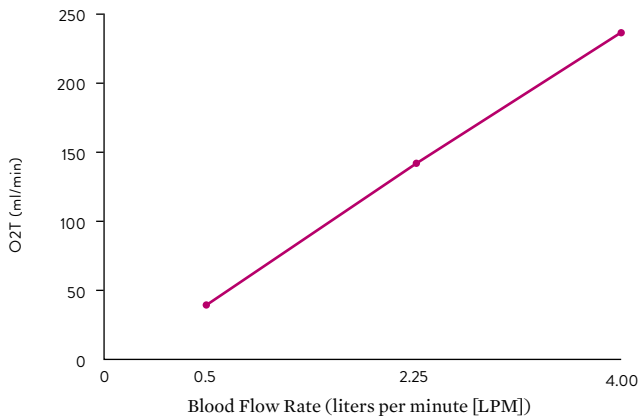


CO₂ TRANSFER

Efficiency of blood carbon dioxide removal

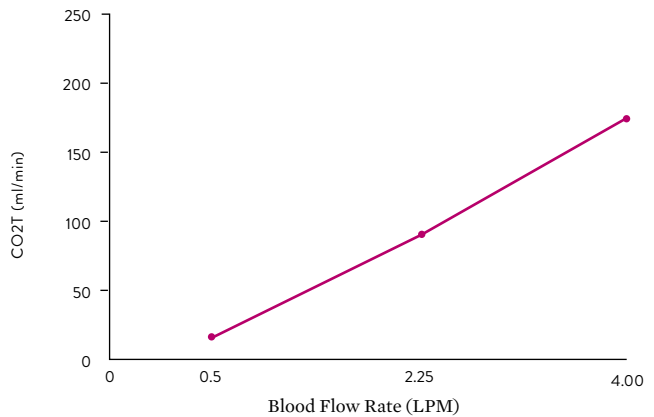


PRESSURE DROP

Difference in blood pressure before and after the oxygenator

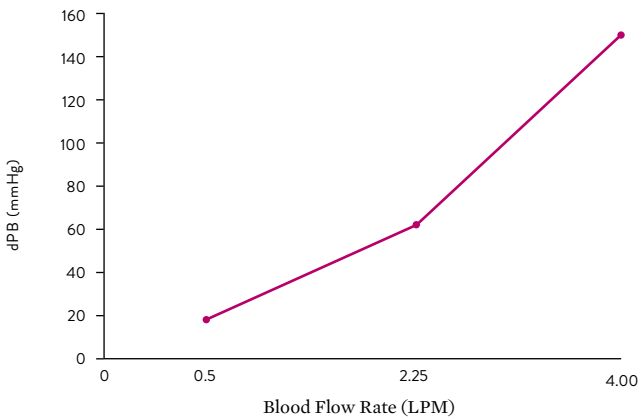

HEAT EXCHANGE

Efficiency of heat exchange

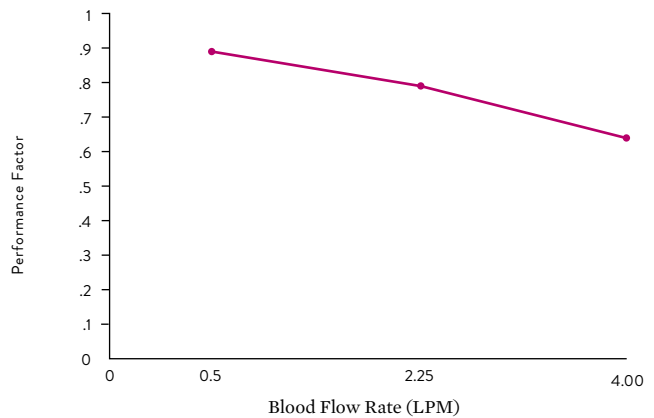

*ISO 7199 Condition

AMG PMP Oxygenators and Oxygenator Holder are manufactured by Eurosets s.r.l. and distributed by Abbott.

Abbott

6101 Stoneridge Drive, Pleasanton, CA 95488 USA, Tel: 1 925 847 8600
Cardiovascular.abbott/CentriMag

Rx Only

Important Safety Information

Brief Summary: Prior to using these devices, please review the Instructions for Use for a complete listing of indications, contraindications, warnings, precautions, potential adverse events and directions for use.

AMG PMP Pediatric Oxygenator Indications [510(k) Clearance; 6-hour use]: The device is indicated for patients who undergo cardiopulmonary bypass surgery requiring extracorporeal circulation for 6 hours or less with a maximum blood flow rate of 4 liters/minute.

AMG PMP Pediatric Oxygenator Contraindications [510(k) Clearance; 6-hour use]: No contraindications are known if the device is used for the purpose described and in accordance with the stated operating conditions. Do not use the device for any purpose other than indicated.

CentriMag™ Blood Pump Indications [510(k) Clearance; 6-hour use]: The CentriMag Circulatory Support System is indicated to pump blood through the extracorporeal bypass circuit for extracorporeal circulatory support for periods appropriate to cardiopulmonary bypass (up to six hours). It is also indicated for use in extracorporeal support systems (for periods up to six hours) not requiring complete cardiopulmonary bypass (e.g. valvuloplasty, circulatory support during mitral valve reoperation, surgery of the vena cava or aorta, liver transplants etc.).

CentriMag Blood Pump Contraindications [510(k) Clearance; 6-hour use]: The CentriMag Circulatory Support System is contraindicated for use as a cardiotomy suction device. The system is also contraindicated for patients who are unable or unwilling to be treated with an appropriate anticoagulant such as Heparin or a comparable alternative.

™ Indicates a trademark of the Abbott group of companies.

‡ Indicates a third-party trademark, which is property of its respective owner.

© 2023 Abbott. All Rights Reserved.

MAT-2203890 v4.0 | Item approved for U.S. use only.

